





### ■ DIMENSION

KT-05N, KT-05P / KT-05N-QD, KT-05P-QD



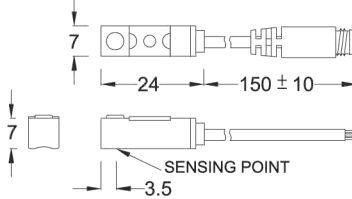


KT-05R, KT-05D / KT-05R-QD, KT-05D-QD

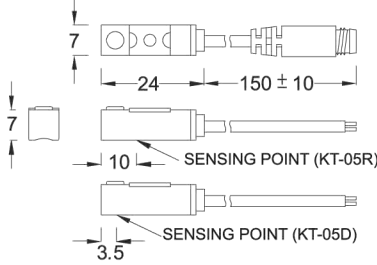

Unit:mm

### ■ QD PINOUT




### ■ SPECIFICATION

TYPE	KT-05R	KT-05D	KT-05N	KT-05P
<b>CONNECT DIAGRAM</b>				
<b>CHARACTERISTICS</b>	2-Wire Type		3-Wire Type	
WIRING METHOD	2-Wire Type		3-Wire Type	
SWITCHING LOGIC	SPST, Normally Open	Solid State Output, Normally Open		
SENSOR TYPE	Reed Switch	--	NPN Current Sinking	PNP Current Sourcing
OPERATING VOLTAGE	5~240V DC/AC	10~28V DC	5~30V DC	
SWITCHING CURRENT	100 mA max.	50 mA max.	200 mA. max.	
CONTACT RATING (NOTE 1)	10 W max.	1.5 W max.	6W max.	
CURRENT CONSUMPTION	--		8 mA @ 24V DC max.	
VOLTAGE DROP	3.0 V max.	3.5 V max.	1 V @ 200mA max.	
LEAKAGE CURRENT	--	0.8 mA max.	0.01 mA max.	
INDICATOR	Red LED			Green LED
CABLE	ø2.8, 2C, PVC		ø2.8, 3C, PVC	
OPERATING FREQUENCY	200 Hz	1000 Hz		
MAGNET REQUIREMENT (NOTE 2)	50 Gauss	40 Gauss		
TEMPERATURE RANGE	-10~70°C			
SHOCK (NOTE 3)	30 G	50 G		
VIBRATION (NOTE 4)	9 G			
ENCLOSURE CLASSIFICATION	IEC 529 IP 67			
PROTECTION CIRCUIT (NOTE 5)	1	2,4	2,3,4	

**NOTE:**

1. WARNING: Never exceed rating (Watt=Voltage x Amperage). Permanent damage to sensor will occur.
2. Measuring standard target: ø15.5Xø8X5t (Anisotropy rubber magnet)
3. Sin wave / X, Y, Z 3 directions / 3 times each direction / 11 ms each time.
4. Double amplitude 1.5 mm / 10Hz~55Hz~10Hz (Sweep 1 min) / X, Y, Z 3 directions / 1 hour each time.
5. 1=None / 2=Short-circuit / 3=Power Source Reverse polarity / 4=Surge Suppression

### ■ MOUNTING CLAMPS



BK Series  
(See Page 2-34 )

